



TRACCIABIANCO



4200943 • 40,5X61/16"x24" R10 ■ 126
4201180 • 40,5X61/16"x24" R11 ■ 126



4200935 • 20X40,5/8"x16" R10 ■ 157



4200939 • 40,5X40,5/16"x16" R10 ■ 157

MOSAICO MOSAIC
30X30/12"X12"



4200951 • MOSAICO ▲ 37



TRACCIAGRIGIO



4200945 • 40,5X61/16"x24" R10 ■ 126
4201182 • 40,5X61/16"x24" R11 ■ 126



4200937 • 20X40,5/8"x16" R10 ■ 157



4200941 • 40,5X40,5/16"x16" R10 ■ 157

MOSAICO MOSAIC
30X30/12"X12"




4200953 • MOSAICO ▲ 37



TRACCIABEIGE



4200944 • 40,5X61/16"x24" R10 ■ 126
4201181 • 40,5X61/16"x24" R11 ■ 126

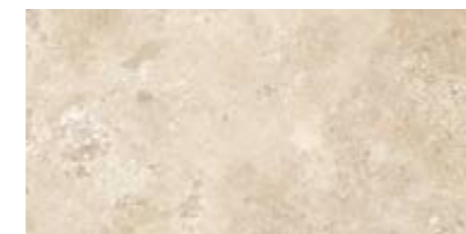

4200936 • 20X40,5/8"x16" R10 ■ 157



4200940 • 40,5X40,5/16"x16" R10 ■ 157

MOSAICO MOSAIC
30X30/12"X12"



4200952 • MOSAICO ▲ 37



4200897 • BOX MULTIFORMATO BIANCO R10 ■ 157



4200899 • BOX MULTIFORMATO GRIGIO R10 ■ 157



4200898 • BOX MULTIFORMATO BEIGE R10 ■ 157



Gres Porcellanato Smaltato / Glazed Porcelain Floor Tiles / Gres Cerame émaillé / Glasiertes Feinsteinzeug
 Gruppo d'appartenenza / Class / Groupe d'appartenance / Zugehörigkeitsgruppe EN 14411•13006 Bla GL

| CARATTERISTICHE FEATURES CARACTERISTIQUES EIGENSCHAFTEN | UNITÀ DI MISURA UNIT OF MEASUREMENT UNITÉ DE MESURE MASSEINHEIT | VALORE MEDIO MEAN VALUE VALEUR MOYENNE DURCHSCHNITTSWERT | VALORE PRESCRITTO REQUIRED STANDARDS VALEUR PRESCRITE VORGESCHRIEBENER WERT | METODO DI PROVA TEST METHOD MÉTHOD D'ESSAI PRÜFMETHODE |
|---|--|---|--|---|
| DIMENSIONE LATI DIMENSIONS - LENGHT AND WIDTH DIMENSIONS - LONGUEUR ET LARGEUR LÄNGE UND BREITE | % | CONFORME ACCORDING CONFORME GLEICHMÄSSIG | ± 0,6 (MAX ± 2 mm) | EN ISO 10545-2 |
| RETTILINEITÀ DEI LATI SIDES' STRAIGHTNESS RECTITUDE DES CÔTES GERADLINIGKEIT DER KANTEN | % | CONFORME ACCORDING CONFORME GLEICHMÄSSIG | ± 0,5 (MAX ± 1,5 mm) | EN ISO 10545-2 |
| ORTAGONALITÀ DEI LATI RECTANGULARITY OCTOGONALITÉ DES CÔTES RECHTWINKLIGKEIT DER KANTEN | % | CONFORME ACCORDING CONFORME GLEICHMÄSSIG | ± 0,5 (MAX ± 2 mm) | EN ISO 10545-2 |
| PLANARITÀ FLATNESS PLANEITUDE EBENFLÄCHIGKEIT | % | CONFORME ACCORDING CONFORME GLEICHMÄSSIG | ± 0,5 (MAX ± 2 mm) | EN ISO 10545-2 |
| SPESSORE THICKNESS ÉPAISSEUR DICKE | % | CONFORME ACCORDING CONFORME GLEICHMÄSSIG | ± 5 (MAX ± 0,5 mm) | EN ISO 10545-2 |
| ASSORBIMENTO D'ACQUA WATER ABSORPTION ABSORPTION D'EAU WASSERAUFNAHME | % | CONFORME ACCORDING CONFORME GLEICHMÄSSIG | ≤ 0,5 | EN ISO 10545-3 |
| SFORZO DI ROTTURA BREAKING STRENGTH CONTRAÎTE DE RUPTURE BRUCHKRAFT | N | CONFORME ACCORDING CONFORME GLEICHMÄSSIG | ≥ 1300 SE SPESS ≥ 7,5 mm ≥ 700 SE SPESS < 7,5 mm | EN ISO 10545-4 |
| MODULO DI ROTTURA MODULUS OF RUPTURE COEFFICIENT DE RUPTURE BRUCHMODUL | N/mm ² | CONFORME ACCORDING CONFORME GLEICHMÄSSIG | ≥ 35 | EN ISO 10545-4 |
| RESISTENZA ALL'ABRASIONE RESISTANCE TO ABRASION RÉSISTANCE À L'ABRASION BESTÄNDIGKEIT GEGEN OBERFLÄCHENVERSCHLEISS | | PEI 4-5 | CLASSE 1-5 CLASS 1-5 CLASSE 1-5 KLASSE 1-5 | EN ISO 10545-7 |
| COEFFICIENTE DI DILATAZIONE TERMICA LINEARE COEFFICIENT OF LINEAR THERMAL EXPANSION COEFFICIENT DILATION THERMIQUE LINÉAIRE LINEARE WÄRMEAUSDEHNUNGSKOEFFIZIENT | 10 ⁻⁴ /°C | δt = 6,6 | METODO DISPONIBILE METHOD AVAILABLE MÉTHODE DISPONIBLE VERFÜGBARE METHODE | EN ISO 10545-8 |
| RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO THERMAL SHOCK RÉSISTANCE AUX VARIATIONS THÉRIQUES TEMPERATURWECHSELBESTÄNDIGKEIT | | RESISTE RESISTS RÉSISTE WIDERSTANDSFÄHIG | METODO DISPONIBILE METHOD AVAILABLE MÉTHODE DISPONIBLE VERFÜGBARE METHODE | EN ISO 10545-9 |
| RESISTENZA ALL'ATTACCO CHIMICO CHEMICAL RESISTANCE RÉSISTANCE AUX PRODUITS CHIMIQUES BESTÄNDIGKEIT GEBIEN CHEMIKALIEN | | GA | GB MIN | EN ISO 10545-13 |
| RESISTENZA AGLI ACIDI E ALLE BASI A BASSA CONCENTRAZIONE RESISTANT TO ACID AND LOW CONCENTRATION BASES RÉSISTANCE AUX ACIDES ET AUX BASES À FAIBLE CONCENTRATION WIDERSTANDSFÄHIGKEIT GEGEN NIEDRIG KONZENTRIERTEN SÄUREN UND LAUGEN | | GLA | METODO DISPONIBILE METHOD AVAILABLE MÉTHODE DISPONIBLE VERFÜGBARE METHODE | EN ISO 10545-13 |
| RESISTENZA AL GELO FROST RESISTANCE RÉSISTANCE AU GEL FROSTBESTÄNDIGKEIT | | RESISTE RESISTS RÉSISTE WIDERSTANDSFÄHIG | RICHIESTA REQUIRED REQUIS ERFORDERLICH | EN ISO 10545-12 |
| STABILITÀ DEI COLORI SMALL COLOUR DIFFERENCES STABILITÉ DES COULEURS LICHTECHTHEIT | | STABILE STABLE STABLE STABIL | METODO DISPONIBILE METHOD AVAILABLE MÉTHODE DISPONIBLE VERFÜGBARE METHODE | DIN 51094 |



Casa Bella - Via Monte Mongigatto nr. 24 Int. 4 - 41042 Fiorano Modenese [MO] Italy
 Tel +39 0536 839311 Fax +39 0536 920039 - Mail - info@casabellaceramiche.it - www.colli.casabellaceramiche.it



TRACCIA




TRACCIA

40,5X61 16"X24" 40,5X40,5 16"X16" 20X40,5 8"X16"

IMBALLI E PESI / packing

| FORMATI /size | PCS | MQ/BOX | KG/BOX | BOX/PLT | MQ /PLT | KG/PLT |
|--------------------|-----|--------|--------|---------|---------|---------|
| 20X40,5 | 12 | 0,98 | 20,00 | 58 | 56,84 | 1160,00 |
| 40,5X40,5 | 6 | 0,98 | 20,00 | 58 | 56,84 | 1160,00 |
| 40,5X61 | 6 | 1,49 | 29,80 | 40 | 59,60 | 1192,00 |
| MULTIFORMATO 3+3+3 | | 1,44 | 29,80 | 40 | 57,60 | 1192,00 |

Pezzi speciali/trims disponibili su tutti i colori - Available on every colour

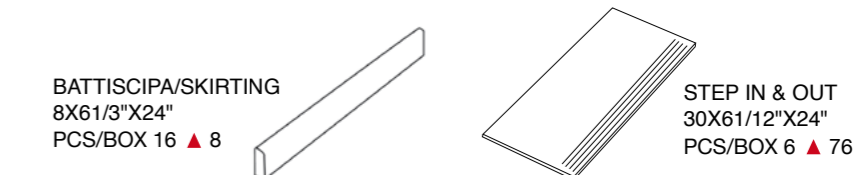

Gres Porcellanato Smaltato Glazed Porcelain Floor Tiles SP. /Thickness $\frac{9,5}{K}$

PREZZI / Price prezzo MQ price/SMQ prezzo / pezzo price / piece Variazione importante Significant variation

| NR. | € | NR. | € | NR. | € | NR. | € |
|-----|------|-----|-------|-----|-------|-----|-------|
| 8 | 3,75 | 37 | 11,00 | 76 | 20,75 | 126 | 33,50 |
| | | 157 | 46,25 | | | | |

AVVERTENZE
 Una corretta posa in opera, seguendo alcune semplici regole, garantirà un perfetto risultato finale:
 - controllare la planarità delle pareti da rivestire o del massetto su cui posare le piastrelle da pavimento - posare il prodotto miscelando il materiale prelevandolo da più scatole.
 - maneggiare con cura il prodotto prima e durante la posa. Per una migliore estetica utilizzare stuccature colorate in tinta con le piastrelle.
 Per nessun motivo saranno accolte contestazioni su materiale posato per danni visibili prima della posa.
 Prima di eseguire la posa si consiglia di allinearli al prodotto da abbinare per stabilire le dimensioni della fuga da utilizzare per neutralizzare eventuali scallibrature. In alternativa suggeriamo di valutare una posa "sfalsata" che si ottiene partendo a 2/3 rispetto ai lati di allineamento.
 CASA BELLA si riserva di apportare modifiche senza preavviso ai prodotti declinando ogni responsabilità per danni diretti o indiretti derivanti da eventuali modifiche.

I colori e le caratteristiche estetiche dei materiali illustrati nel presente catalogo sono da ritenersi puramente indicativi.
 Le tabelle con i dati riferiti ai contenuti per scatole ed ai pesi degli imballi sono aggiornate al momento della stampa del catalogo, pertanto i dati elencati possono subire variazioni.
 Il nostro personale di vendita è a vostra disposizione per dettagli e chiarimenti sui nostri prodotti.
 Consigliamo l'uso di prodotti FILA per la pulizia dei nostri prodotti -www.filachim.com

ADVICE
 A properly performed laying, following a few simple rules, will ensure a perfect finished result:
 - check that the wall or floor slab onto which you will be laying the tiles is perfectly flat. - pick material at random from different boxes while laying.
 - handle the product with care before and during laying. - for better aesthetic results, use coloured grouts to match the tiles
 Claims on items which have already been laid won't be accepted, for any reason for any damage visible before laying. The decorative strips for porcelain stoneware are made on the press and subject to slight variations in caliber. Before laying, you are recommended to align the product with which they are to be combined in order to establish the size of the grouting gap to neutralize any differences in gauges. Alternatively, you could lay "offset" by starting 2/3 from the alignment sides.
 CASA BELLA reserves the right to modify the mentioned products without notice, declining all responsibility on direct or indirect damages caused by eventual modification.

Colours and esthetical features of the materials as illustrated in this catalogue are to be regarded as mere indications.
 The tables containing the details of the content per box and the weight of packing are updated at the time the catalogue is printed; therefore the listed data may change. Our sales department is at your disposal for any question you may have concerning our products.
 For cleanliness and maintenance of our products we recommend FILA products -www.filachim.com